


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	M	REVISED PER ECR-06-010412	03NOV06	HMR KR



- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [.330] CENTERS.
- SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRES OF THE SAME TYPE AND SIZE, COPPER RANGE IS 0.36-0.57mm [#27-#23] AWG.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

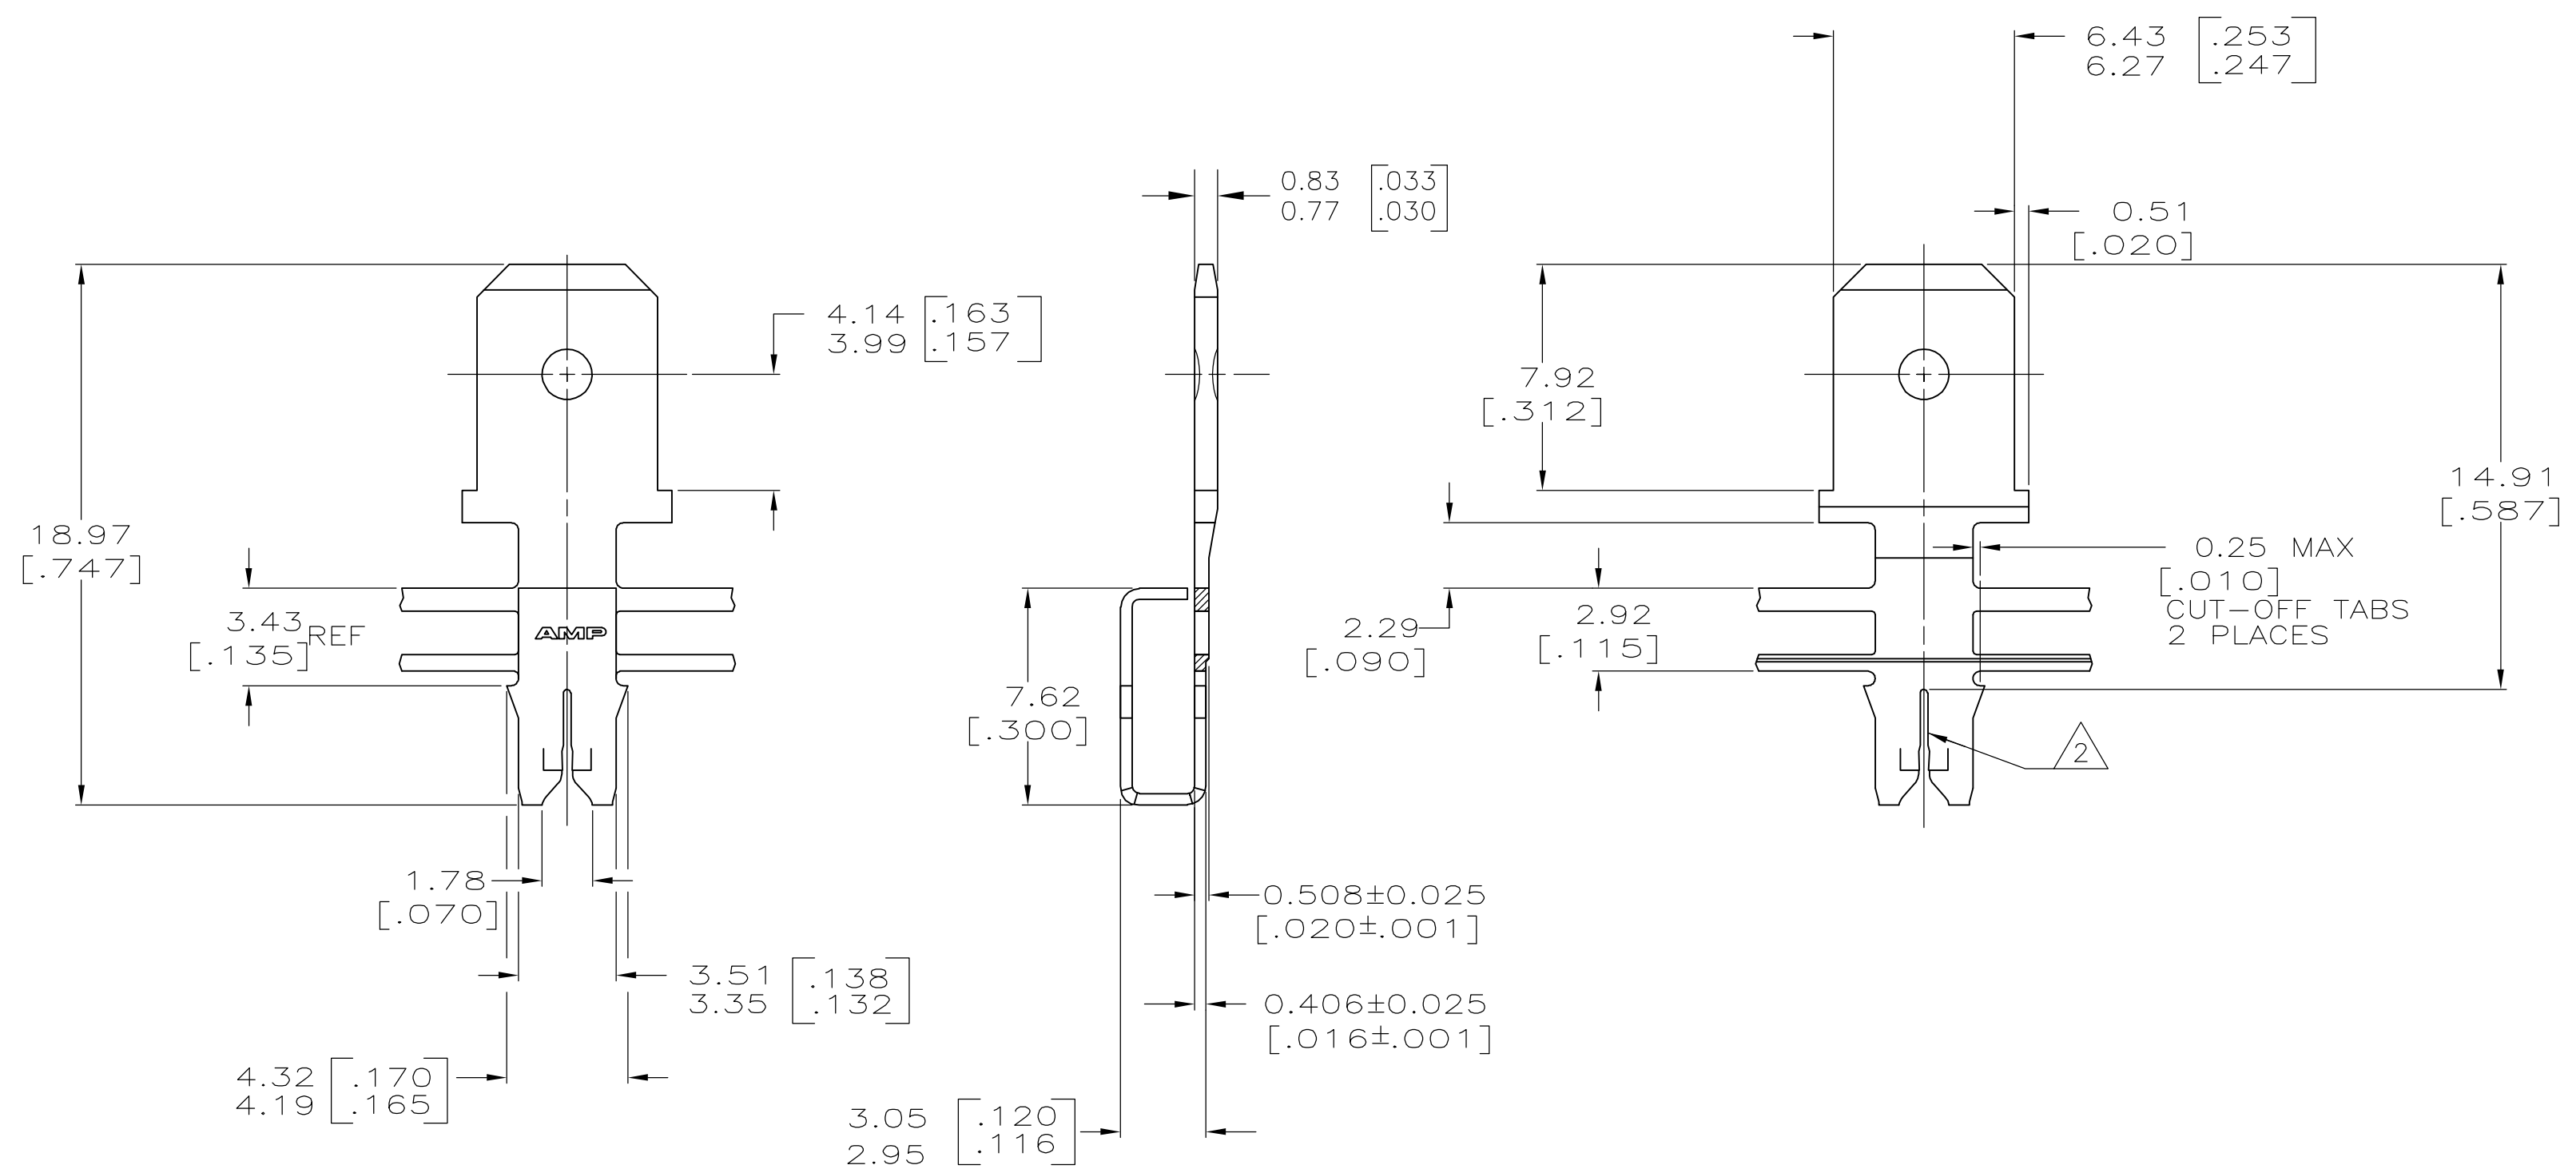

BOX DOWN TAB BACK	62652-2
BOX DOWN TAB FOWARD	62652-1
REELING, LEFT TO RIGHT	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	MICHAEL S. FEHER	1/3/91		Tyco Electronics Corporation	
DIMENSIONS: mm [INCHES]		CHK	JEFF R. RUTH	1/14/91		Harrisburg, PA 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NELSON E. NEFF	1/14/91	NAME		
0 PLC ± -		PRODUCT SPEC		TAB, 6.35 [.250] FASTON™, MAG-MATE™			
1 PLC ± -		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO			
2 PLC ± 0.25 [.010]		114-2046		A2 00779		G-62652	
3 PLC ± -		WEIGHT		SCALE		SHEET	
4 PLC ± -		#2 HARD PRE-MILLED BRASS		5:1		1 of 1	
ANGLES ± -		FINISH		REV		M	
0.002037 [.000080]		MIN TIN PER MIL-T-10727		CUSTOMER DRAWING			