


MODEL:

PDU15NET

Single-Phase Switched 1U Mini PDU



Network Interface





1.5kW Load Capacity



5-15 Input/Output

- A** Network Interface
- B** RJ45 Ethernet Jack
- C** Manual Configuration Port
- D** Environmental Monitoring Port
- E** SNMP Reset Button
- F** 5-15R Outlets (Individually Switched)
- G** 5-15P Plug with 6 ft. Power Cord
- H** Rackmounting Brackets
- I** Power Status LEDs

Also Includes: Owner's Manual

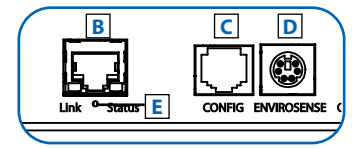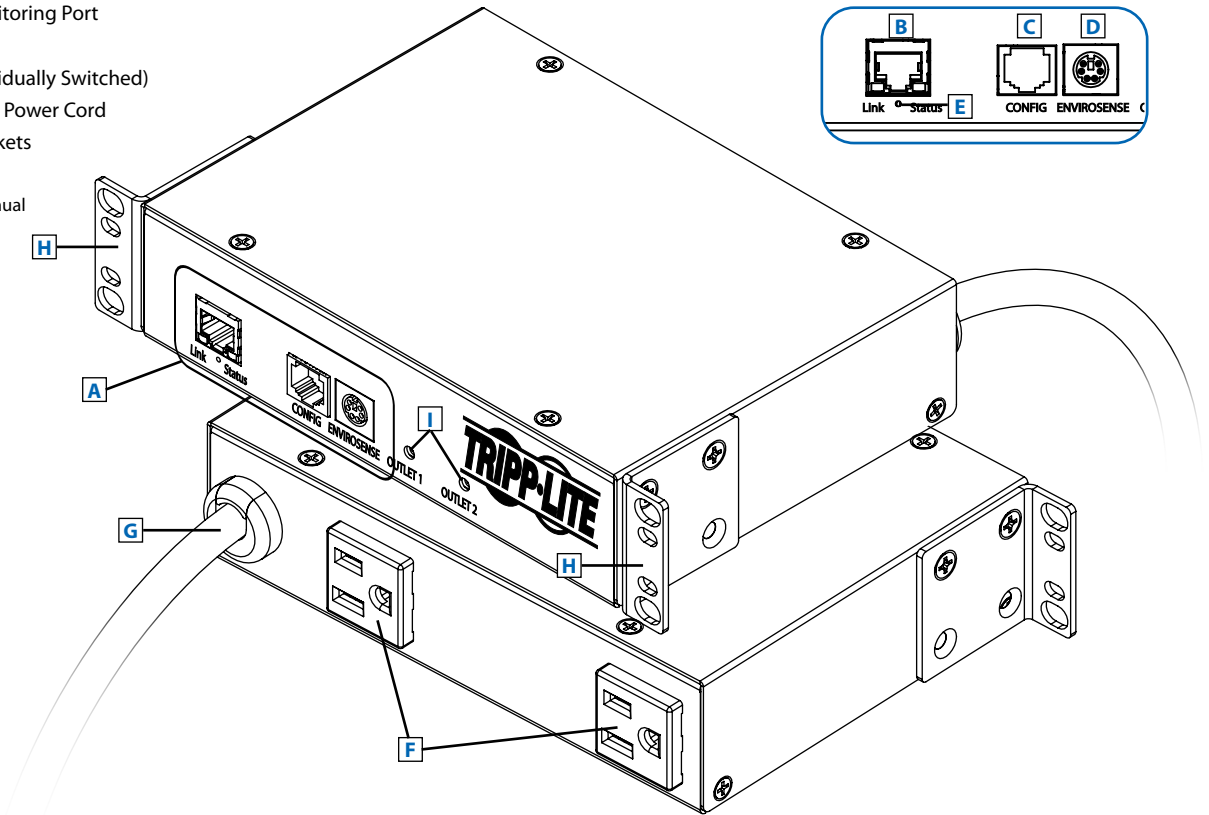

Specifications


Model	PDU15NET
Voltage	120V
Frequency	50 / 60 Hz
Load Capacity	1.5kW
Agency De-rated Input Capacity	12A
Input Plug	5-15P
Input Cord Length	6 ft. / 1.83 m
Outlets	2 x 5-15R
Mounting Options	0U rack, wall and under-counter
Unit Dimensions (W x H x D)	7 x 1.72 x 5 in. / 178 x 44 x 127 mm
Unit Weight	2.64 lb. / 1.2 kg
Standards	Tested to UL 60950-1 (USA), CSA (Canada), Class A Part 15 (Emissions), NOM (Mexico), RoHS, TAA-compliant

- Distributes 1.4kW Single-Phase power to two NEMA 5-15R switched outlets
- Remote monitoring via secure web browser, SSH, telnet or SNMP
- Perfect option for small-scale applications with 0U rack, wall and under-counter mounting options


SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.tripplite.com

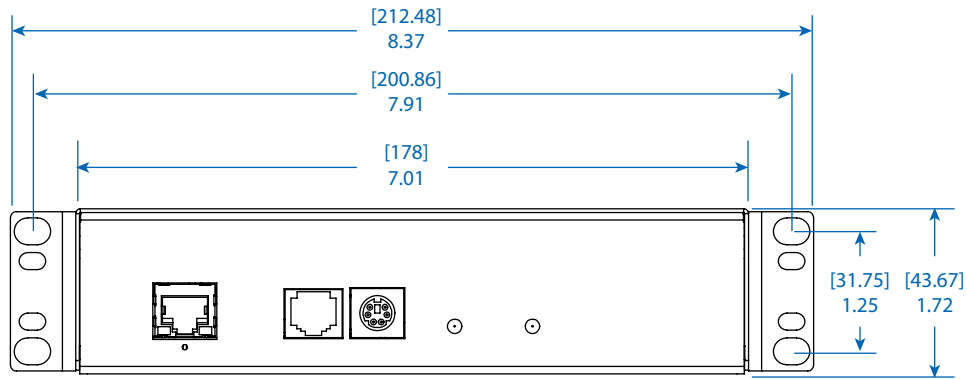


FRONT VIEW

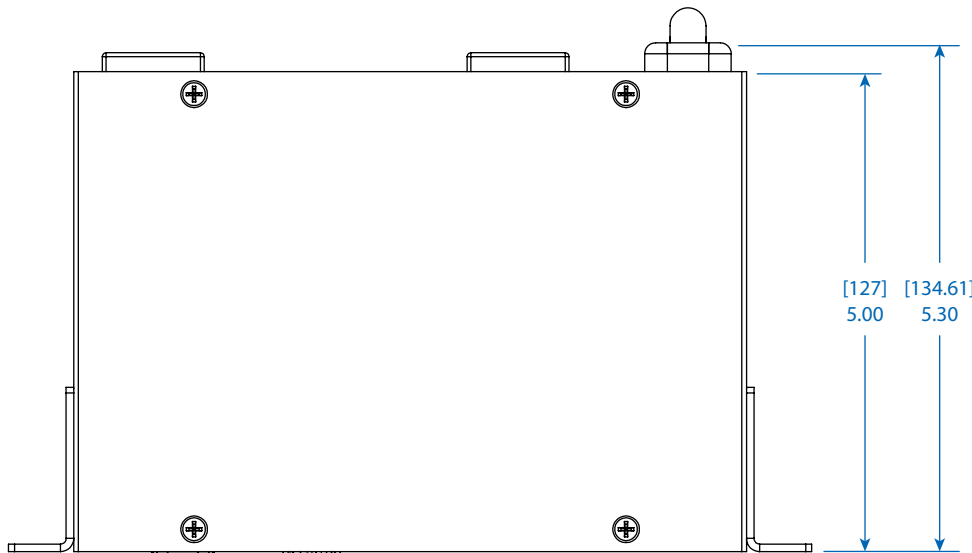

TOP VIEW

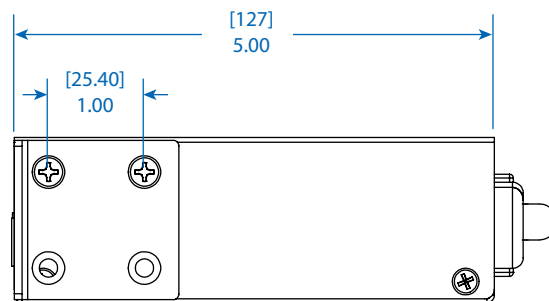

SIDE VIEW

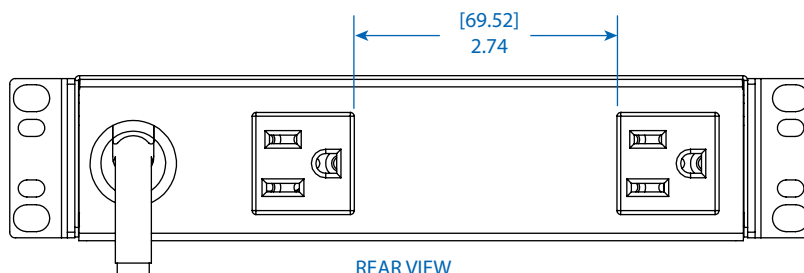

REAR VIEW

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
PDU15NET

1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.tripplite.com