


AE-B48-16SST1

DIP40/BGA48 specialized adapter for FLASH memory.
 Device package dimensions: 8.0 x 6.0 x 1.1 mm, 0.8 mm pitch.

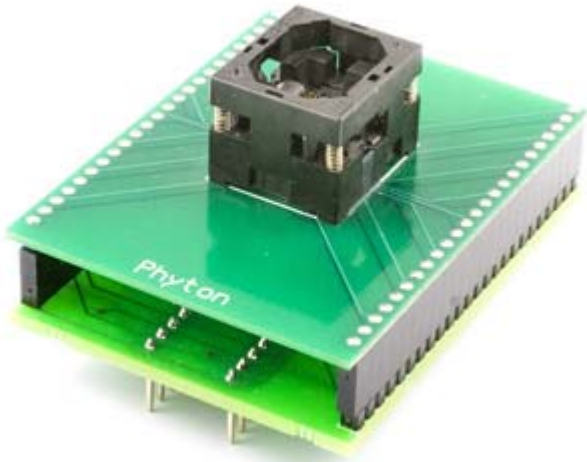

Click the programmer model below to get an appropriate list of the devices supported by the adapter:

- [ChipProg+](#)
- [ChipProg-40](#)

Adapter Connection Table:

DIP-40	TFBGA-48	74HC573	C1, 150pF	C2, 0.1uF
1	F6			
2	B2			
3	C3			
4	G1			
5	D3			
6	A2	4		
7		11	1	
8	A4			
9	F3			
10	D2	7		
11	B3			
12	B4			
13	D1	3		
14	E2			
15	F4			
16	H5			
17	E5			
18	F5			
19	G2			
20	H1,H6	1,10	2	1

21	F2			
22	G6			
23	C1	8		
24	E1	9		
25	H4			
26	G5			
27	E4			
28	A1	6		
29	C4			
30	A3			
31	G3			
32	H2			
33	C2	5		
34	E3			
35	B1	2		
36	E6			
37	H3			
38	D4			
39	F1			
40	G4	20		2
	D6	17		
	C6	16		
	A6	14		
	B6	19		
	D5	15		
	C5	13		
	A5	18		
	B5	12		