PHŒNIX CONTACT

Fiber optic coupling - PSM-SET-BFOC-LINK/2 - 2799429

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)

Coupling; set consisting of 2 couplings for connecting B-FOC plugs

Key commercial data

Packing unit	1 1
Weight per Piece (excluding packing)	17.0 GRM
Custom tariff number	85366990
Country of origin	Germany

Technical data

Product type	Adapter
Application	Fiber optic coupling

Classifications

eCl@ss

eCl@ss 4.0	27061001
eCl@ss 4.1	27061001
eCl@ss 5.0	27061803
eCl@ss 5.1	27061803
eCl@ss 6.0	27061803
eCl@ss 7.0	27061803
eCl@ss 8.0	27061803

ETIM

ETIM 2.0	EC001122
ETIM 3.0	EC001122

Fiber optic coupling - PSM-SET-BFOC-LINK/2 - 2799429

Classifications

ETIM

ETIM 4.0	EC001122
ETIM 5.0	EC000752

UNSPSC

UNSPSC 6.01	26121607
UNSPSC 7.0901	26121607
UNSPSC 11	26121607
UNSPSC 12.01	26121607
UNSPSC 13.2	26121607

Accessories

Accessories

Adapter

Fiber optic coupling - PSM-SET-FSMA-LINK/2 - 2799416

Coupling; set consisting of 2 couplings for connecting F-SMA plugs

Fiber optic coupling - FL MM PATCH COUPLER LC-LC - 2700312

Coupling, LC/LC, can be used for multi-mode glass fibers

Fiber optic coupling - FL SM PATCH COUPLER LC-LC - 2700313

Coupling, LC/LC, can be used for single mode glass fibers

PHŒNIX CONTACT

Fiber optic coupling - PSM-SET-BFOC-LINK/2 - 2799429

Accessories

Fiber optic coupling - FL COUPLER SC-DUPLEX - 2901788

Coupling, SC duplex/SC duplex, compatible with multi-mode and single-mode glass fibers, HCS, and polymer fibers

Connector set

FO connectors - PSM-SET-B-FOC/4-HCS/PN - 2313782

B-FOC (ST) connector set for standard PROFINET HCS fiber cables with 2.2 mm diameter of the individual elements. Consisting of 4 quick mounting connectors with bend protection for self-assembly.

FO connectors - PSM-SET-B-FOC/4-HCS - 2708481

B-FOC (ST) connector set for HCS fiber, for self assembly consisting of 4 quick mounting connectors with bend protection sleeve

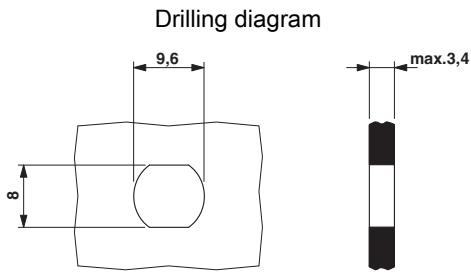## Fiber optics connector (device side)
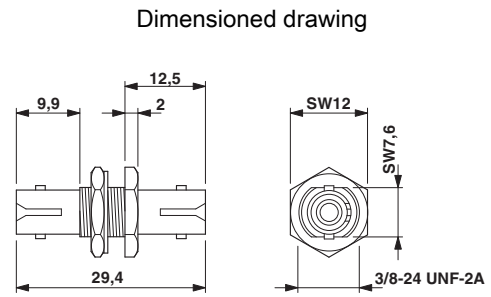
SCRJ female insert - VS-SCRJ-GOF-BU/BU - 1652978

SCRJ socket insert, duplex, for VS-A-F-IP67 panel mounting frame, can be used for fiberglass (multi mode and single mode), HCS, and polymer fibers

Drawings

PHŒNIX CONTACT

Fiber optic coupling - PSM-SET-BFOC-LINK/2 - 2799429

Drilling diagram

9,6

max.3,4

8

Drilling diagranm B-FOC panel feed-through

Dimensioned drawing

9,9   12,5   2

SW12

SW7,6

29,4

3/8-24 UNF-2A

Dimensional drawing B-FOC coupling