


A | B | C | D | E | F | G | H |

1  
2  
3  
4  
5

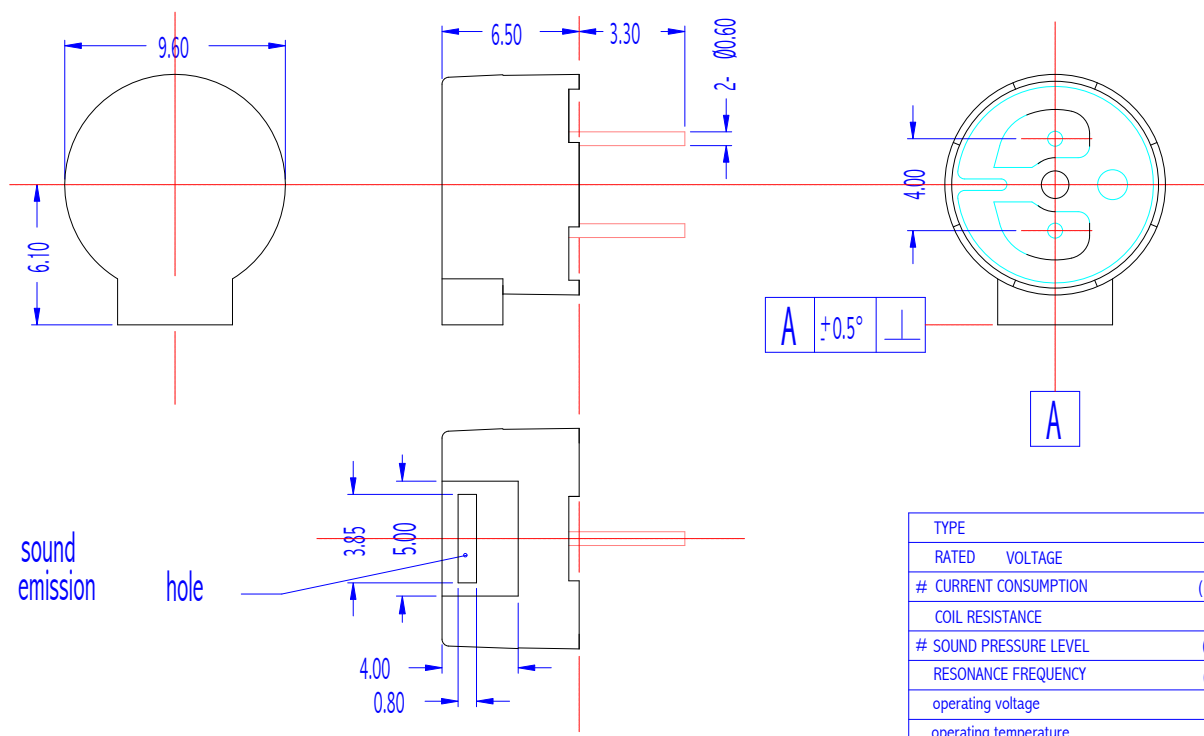

TYPE	GT-1515RP2-H	
RATED VOLTAGE (V)	1.5	
# CURRENT CONSUMPTION (mA)	MAX. 80	
COIL RESISTANCE ( $\Omega$ )	5.5 $1^+$	
# SOUND PRESSURE LEVEL (dB)	96(TYP)	
RESONANCE FREQUENCY (Hz)	2730	
operating voltage (V)	1-2	
operating temperature ( $^\circ\text{C}$ )	-20 $\sim$ +80	
STORAGE TEMPERATURE ( $^\circ\text{C}$ )	-30 $\sim$ +70	
WEIGHT (g)	1	

# VALUE APPLYING RATED VOLTAGE. (2730Hz, 1/2 DUTY CYCLE, SQUARE WAVE)

tolerance: 0.3  $\pm$

5		
4		
3		
2		
1		
NO	DATE	ECN. NO.

SOBERTON INC.		DR.		SCALE		TITLE		BUZZER		
		CHK.		SHEET		MATERIAL	NORYL	PART NO.		
MODEL NO.	GT-1515RP2-H	APP.		UNIT	mm	FINISH		DWG. NO.	1515-H	