


Multilayer Ferrite Chip Beads Standard Type  
(Z-SMS Series)  
KPN: Z0201C601ASMST

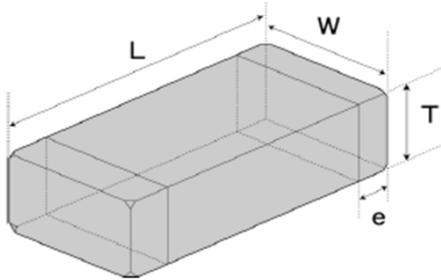


External Dimensions	
L	0.6 ±0.03 mm
W	0.3 ±0.03 mm
T	0.3 ±0.03 mm
e	0.15 ±0.05 mm

Products Characteristics Table	
Case Size (EIA/JIS)	0201/0603
Impedance	600Ω
Impedance Measuring Frequency	100MHz
Rated Current	150mA
DC Resistance (max)	1.2Ω
Temperature Range	-55 to +125 °C
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

Features
<b>-Item Summary</b>
600Ω, 150mA, 0201
<b>-Lifecycle Stage</b>
Mass Production
<b>-Standard packaging quantity (minimum)</b>
Taping 15,000pcs

Typical Characteristics Fig.

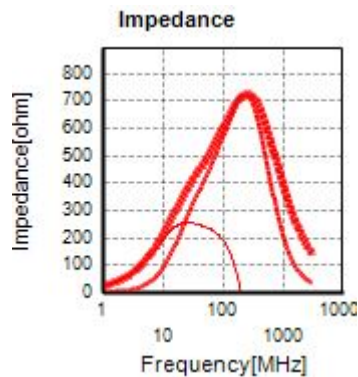

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.