

Number of contacts

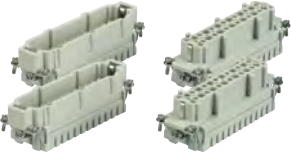
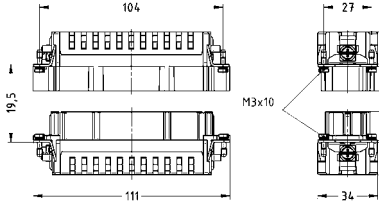

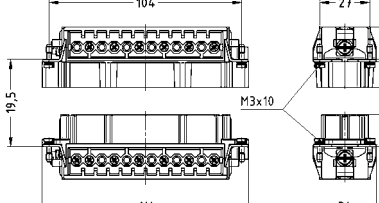
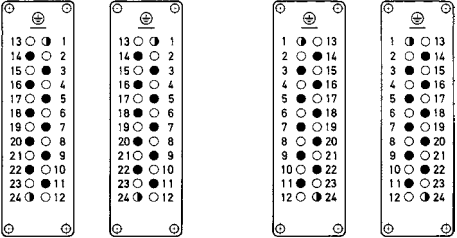
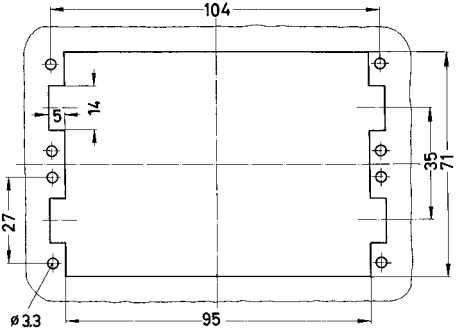
20+

830 V

16 A

+ 4 additional contacts for safe high voltage connections

Han
Hv E

Identification	Wire cross section (mm²)	Part number male female		Drawing Dimensions in mm
<p>Han Hv E®, Crimp terminal</p>  <p>Please order crimp contacts separately. Please order two inserts for a complete assembly!</p>		09 34 010 2602	09 34 010 2702	
<p>Han Hv E®, Screw terminal, silver plated contacts, contact resistance ≤1 mOhm</p>  <p>Please order two inserts for a complete assembly!</p>	0.75 – 2.5	09 34 010 2601	09 34 010 2701	  <p>M F Contact arrangement (view from termination side) Han® 20 Hv E</p> <ul style="list-style-type: none"> ◆ Working contact ● Relay contact ○ Without contact  <p>Panel cut out for inserts for use without hoods/housings</p>