

## specifications

One pair voice patch panel shall be supplied with 24 RJ45 ports with pins 4 and 5 active in each port. The back of the patch panel shall feature one female RJ21 connector with fastener. Patch panel shall mount to standard EIA 19" or 23" racks. Patch panel does not require the use of a punchdown tool.



## technical information

<b>Performance:</b>	Designed to provide connectivity for common active voice equipment
<b>Dimensions:</b>	24 port 1.72"H x 19.0"W x 1.39"D (43.7mm x 482.6mm x 35.3mm), 1 RU
<b>Mounting option:</b>	Mounts to standard EIA 19" rack or 23" rack when used with optional panel extender brackets
<b>Packaging:</b>	Packaged with four 12-24" x .5" round head screws to allow fastening to racks

## key features and benefits

<b>High density</b>	24 ports per rack space
<b>Port and panel identification</b>	Write-on areas and optional label holders; follows TIA/EIA-606-A labeling standards
<b>RJ21 connector</b>	Industry standard connector to mate with PBX equipment. Meets EIA standard environmental and electrical performance
<b>Hook &amp; loop/screw connector</b>	Accommodates 180, 110 or 90 degree patch cord connectors on back of patch panel

## applications

Voice patch panels should be used with the **PANDUIT** cable management system to achieve the most organized and efficient telecommunications room cabling. Patch panel provides maximum density to meet high density requirements and conserve space. In addition, RJ21 style connector makes panel compatible with common active voice equipment.

### Voice Patch Panel

**24 port:** VP24382TV25

### Accessories


**One rack space extender bracket:** PEB1

**Write-on label kit for panel identification:** DPLT

**Write-on label kit for port identification:** DPLF

## WIRING SCHEMATIC

Port	RJ-45 Pin	RJ-21 Pin	Port	RJ-45 Pin	RJ-21 Pin
1	4	1	13	4	13
1	5	26	13	5	38
2	4	2	14	4	14
2	5	27	14	5	39
3	4	3	15	4	15
3	5	28	15	5	40
4	4	4	16	4	16
4	5	29	16	5	41
5	4	5	17	4	17
5	5	30	17	5	42
6	4	6	18	4	18
6	5	31	18	5	43
7	4	7	19	4	19
7	5	32	19	5	44
8	4	8	20	4	20
8	5	33	20	5	45
9	4	9	21	4	21
9	5	34	21	5	46
10	4	10	22	4	22
10	5	35	22	5	47
11	4	11	23	4	23
11	5	36	23	5	48
12	4	12	24	4	24
12	5	37	24	5	49

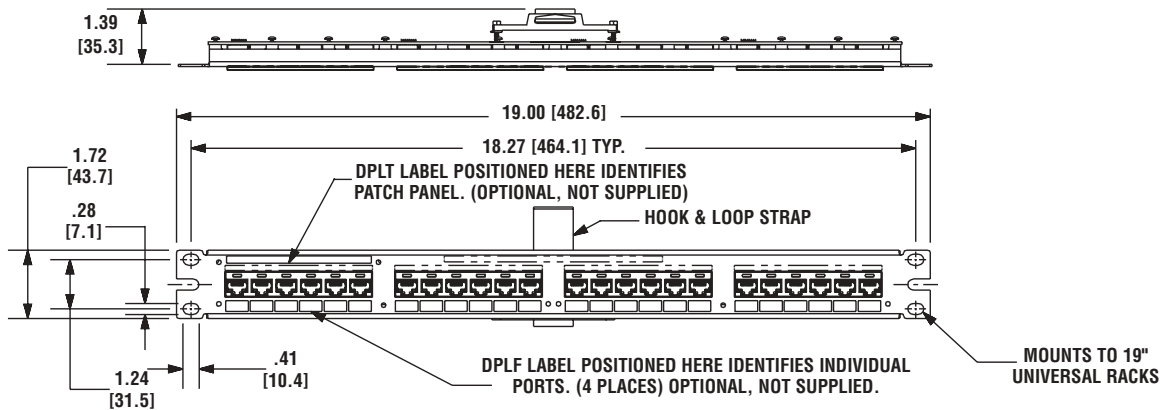

Dimensions are in inches (Dimensions in brackets are in millimeters)

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

**PANDUIT CANADA**  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

**PANDUIT EUROPE LTD.**  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

**PANDUIT SINGAPORE PTE. LTD.**  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6379.6700

**PANDUIT JAPAN**  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.3767.7011

**PANDUIT LATIN AMERICA**  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.333.666.2501

**PANDUIT AUSTRALIA PTY. LTD.**  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)



For more information or to request a catalog

[www.panduit.com](http://www.panduit.com)

cs@panduit.com • 800-777-3300

©2005 PANDUIT Corp.  
ALL RIGHTS RESERVED.  
Printed in U.S.A.

WW-COSP32

04/2005

Replaces WW-COSP09