THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - -.
© COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	REVISED PER ECO-18-008015	24MAY2018	AP	DG

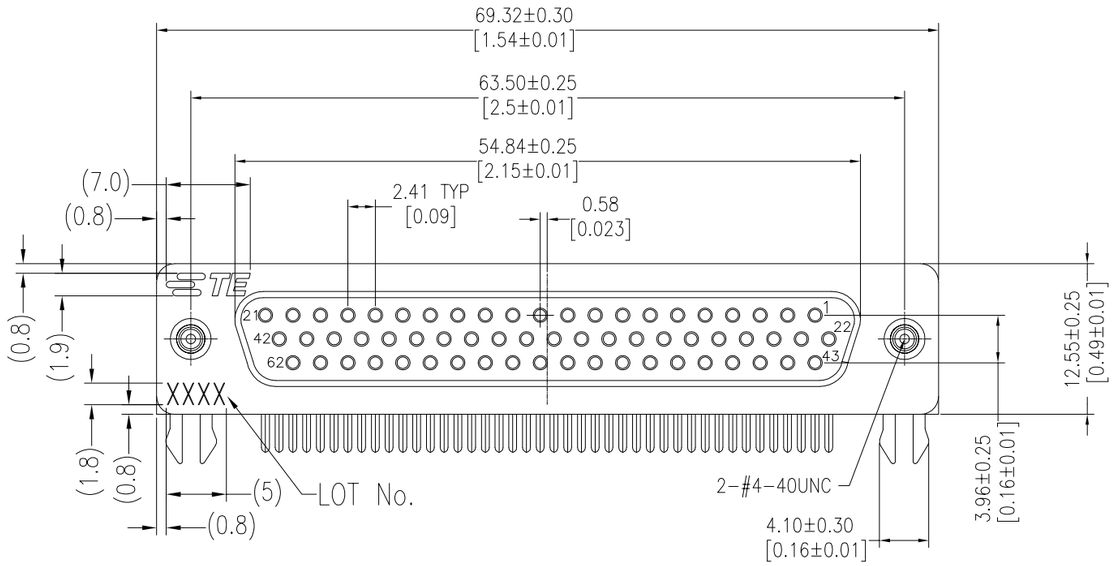

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

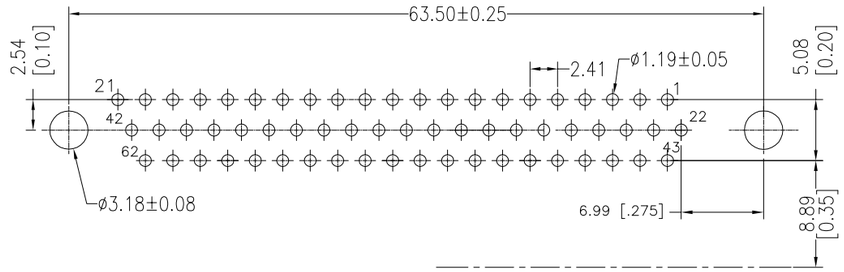

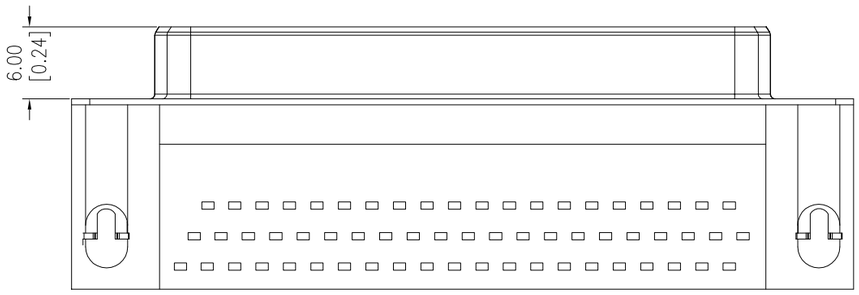

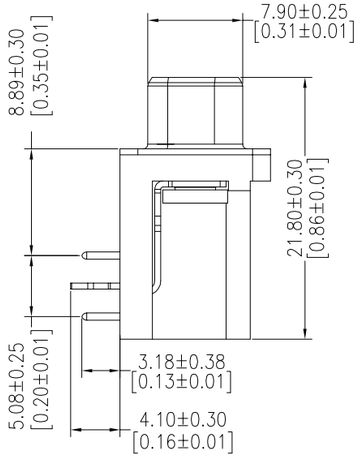

NOTES:

Insulator:PBT+G.F UL94V-O BLACK
Contact:PHOSPHOR BRONZE
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDERTAIL
50u" NICKEL UNDERPLATED OVERALL
Holddown:Brass,100u" TIN OVER 50u" NICKEL
Sheel:Cold Roller Steel,Ni Plated
Rivetlock:Brass,Nickel Plated

LOT NUMBER "XXXX"
- Stands For Calendar Year
- Stands For Week Number

THRAEDED	30µ"Au	2311771-1
TYPE	Contact Area	P/N
	Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.25
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN AJITH PAI 11MAR2017
CHK DANIEL GORENC 11MAR2017
APVD DANIEL GORENC 11MAR2017
PRODUCT SPEC 108-130023
APPLICATION SPEC –
WEIGHT

TE Connectivity

NAME AMPLIMITE RECEPTACLE, HD22, RIGHT ANGLE, 62P
–
–

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-2311771 | RESTRICTED TO –

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV E