MATERIALS AND FINISHES

BODY ZINC ALLOY
PLATED NICKEL

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD

INSULATOR POLYPROYLENE (94V0)

BOARD LOCK PHOSPHOR BRONZE
PLATED TIN

SOLDER TAIL COPPER
PLATED TIN

LOCK WASHER PHOSPHOR BRONZE
PLATED NICKEL

NUT BRASS
PLATED NICKEL

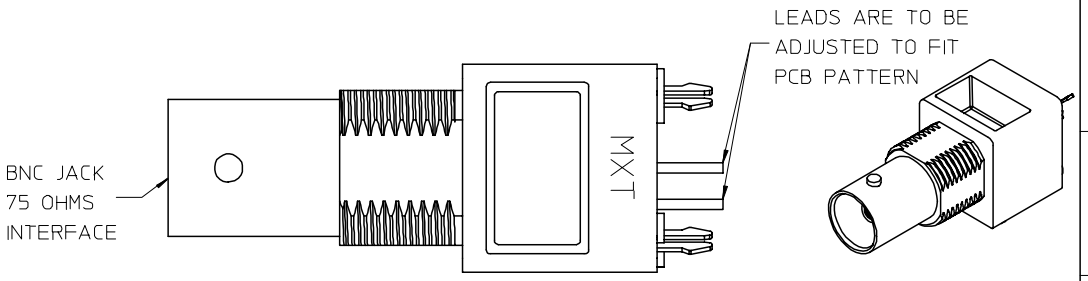

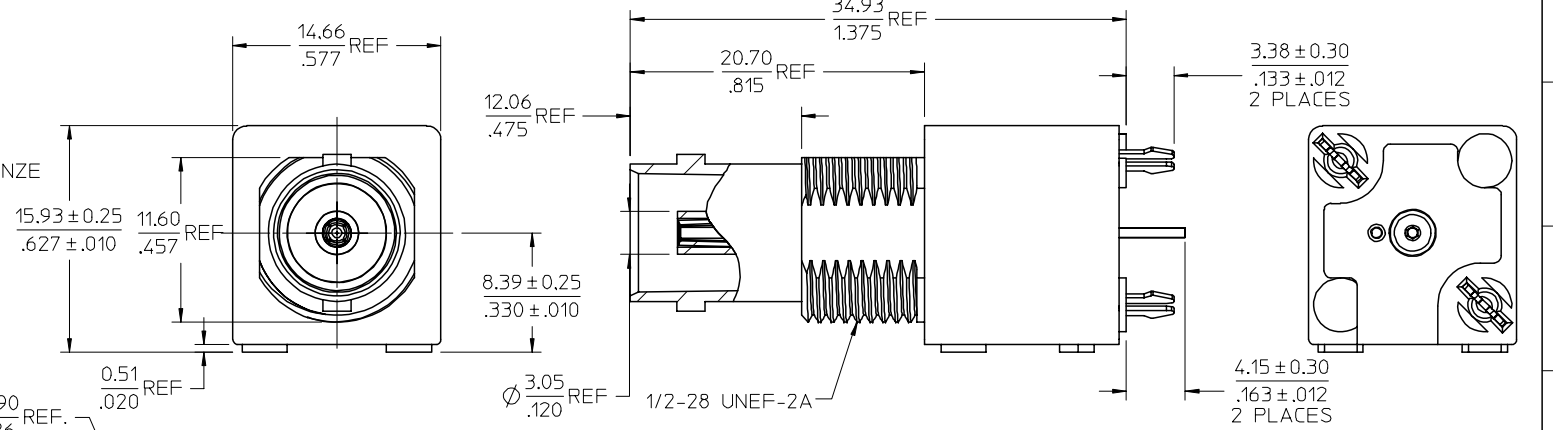

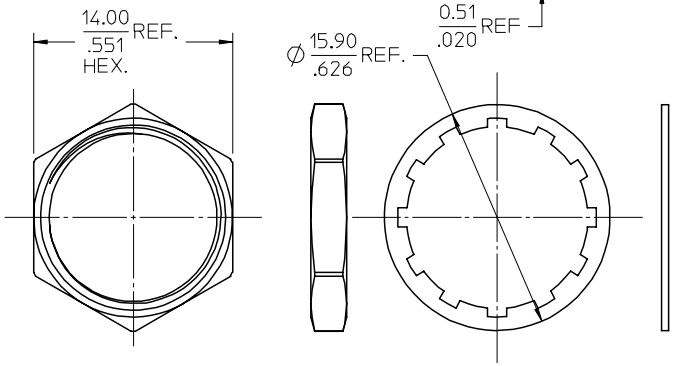

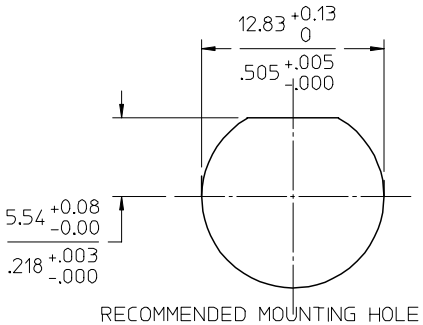

RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS(5.40(.213)
RECOMMENDED MOUNTING TORQUE:
1.36 N-m(12 INCH-LBS)

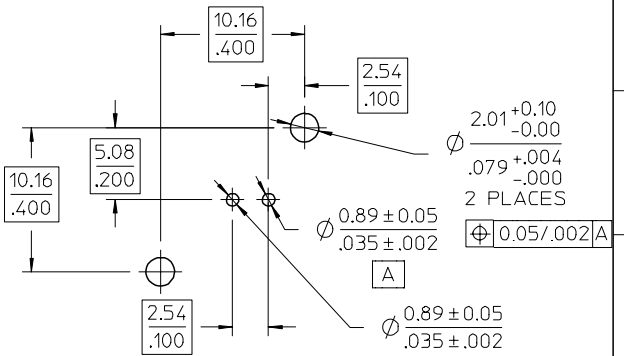

RECOMMENDED PCB HOLE
CONFIGURATION

PS-73598-0051	PRODUCT SPECIFICATION
SPECIFICATION	DESCRIPTION

LOAD W/M
EC NO: URF2007-0419 2007/05/08
DRWN:ELIN 2007/05/09
CHKD: 2007/05/09
APPR:MHUANG
DESCRIPTION
REV
A1

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: EVITA	DATE: 2007/04/20	TITLE: BNC JACK, VERTICAL PCB, DIE CAST,75 OHMS WITH WASHER, NUT BNC-J/PCB
CHECKED BY: RENEE	DATE: 2007/04/20	
APPROVED BY: MISEN	DATE: 2007/04/20	molex MOLEX INCORPORATED
MATERIAL NO.: 731010190		DOCUMENT NO.: SD-73101-019
SIZE: C		SHEET NO.: 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION